


Aosaff

柔性吸能安全防护系统 解决方案

ONE-STOP SOLUTION OF
FLEXIBLE PROTECTION SYSTEM

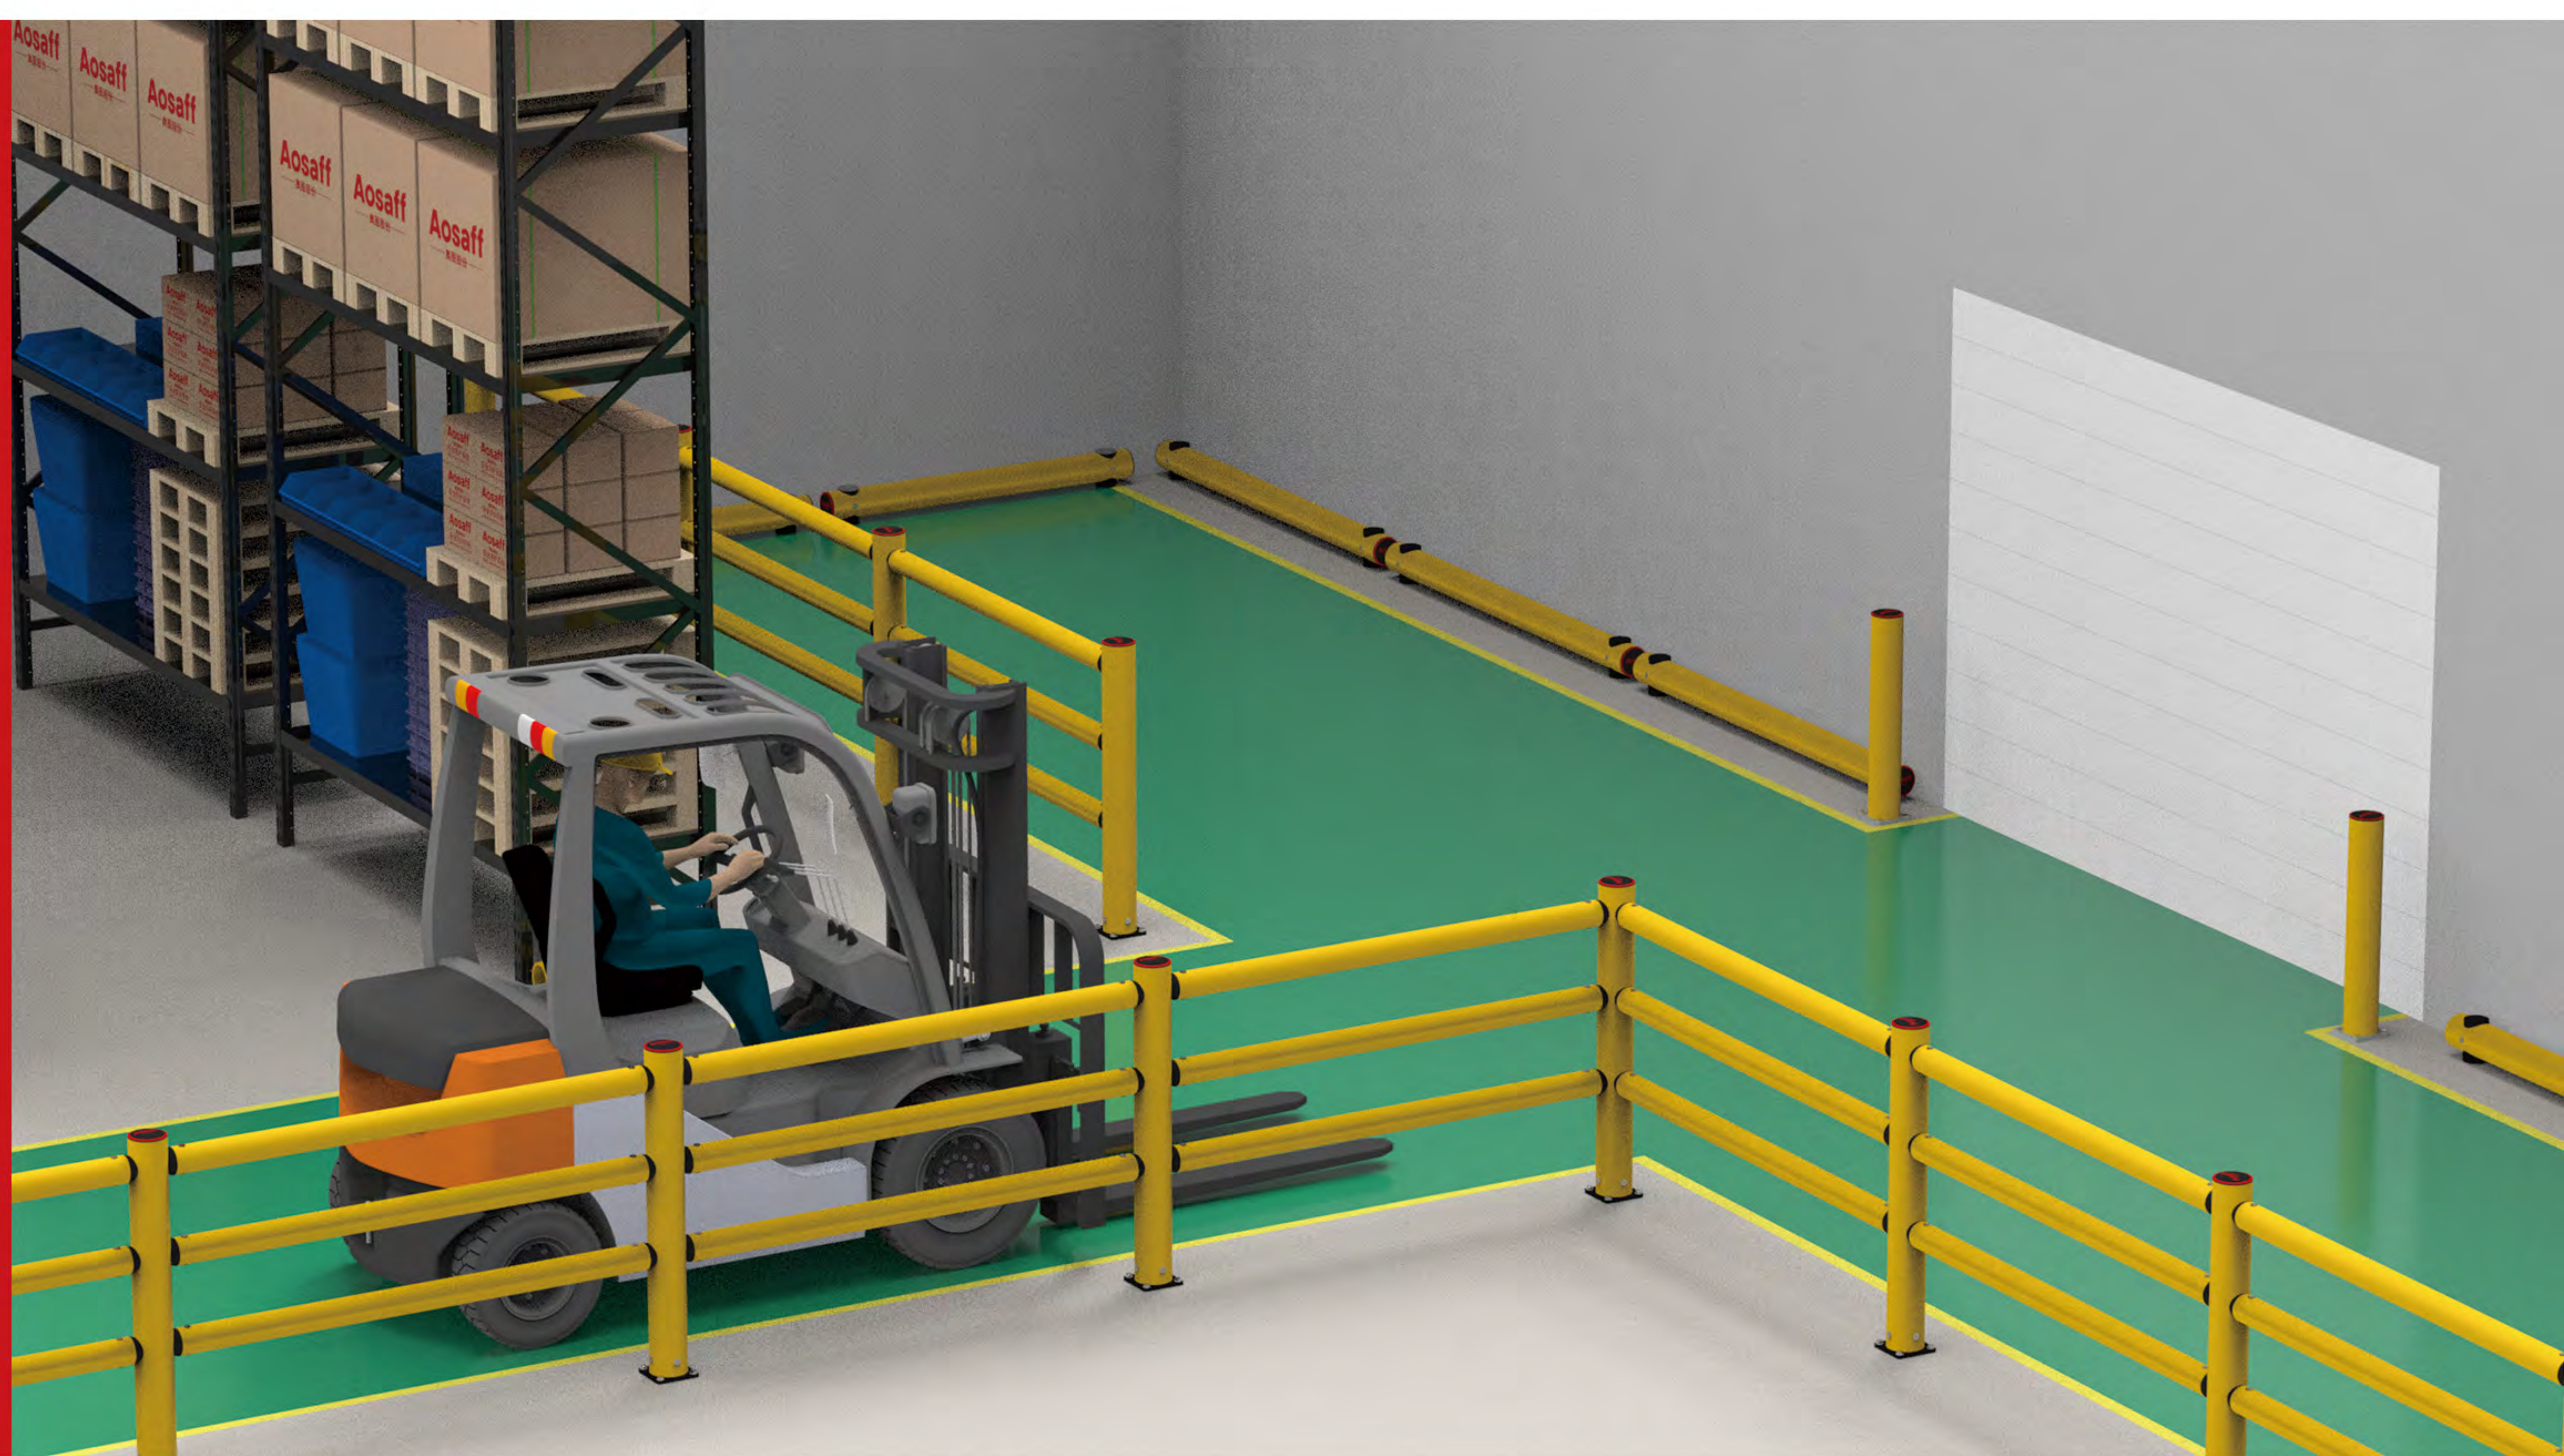

济南奥图自动化股份有限公司
Jinan Aotto Automation Co., Ltd.

Since **2000**

产品特性

PRODUCT FEATURES



◆ 突出的防护能力 | OUTSTANDING PROTECTION CAPABILITY

由进口高分子材料制成的“柔”性护栏在承受撞击时可通过形变吸收能量并在撞击结束时回弹至初始状态，“柔”而长远，“护”而全面，不仅保护您的人员、财产安全，更降低了日常维护费用。

The "flexible" barrier made of imported polymer materials can absorb energy through deformation during impact and rebound to the initial state after impact. It is "flexible" and long-term, "protective" and comprehensive, not only protecting your personnel and property, but also greatly reducing the cost of daily maintenance.



◆ 专业的分体设计 | PROFESSIONAL SPLIT DESIGN

模块化分体设计结构让产品安装更高效，使用方式更灵活。独特的弹性连接件在连接立柱与横梁的同时还可实现多种组合方式。

The modular split design structure makes the product installation more efficient and the usage more flexible. The unique elastic connector can realize various combinations while connecting the bollard and the beam.



◆ 高效的选型软件 | EFFICIENT SELECTION SOFTWARE

自主开发的选型软件可让客户需求快速展现，解放客户设计人员精力，自动生成产品明细，高效、直观、准确，实现快速交付。

The self-developed selection software can quickly display customer needs, liberate the energy of customer designers, and automatically generate product details, which are efficient, intuitive and accurate, and achieve rapid delivery.

产品系列

PRODUCT SERIES

标准护栏

STANDARD BARRIERS



规格参数 Specification

护栏长度 600-1800mm (标准1800mm, 中心到中心)

护栏高度 300/800/1100mm

护柱外径 125mm

横梁外径 90mm

防护能力 1.5T、5km/h

产品颜色 黄色

Barrier length 600-1800mm (standard 1800mm / center to center)

Barrier height 300/800/1100mm

Bollard outer diameter 125mm

Beam outer diameter 90mm

Capacity 1.5T, 5km/h

Product color Yellow

强化护栏

REINFORCED BARRIERS



规格参数 Specification

护栏长度 600-1800mm (标准1800mm, 中心到中心)

护栏高度 500/800/1300mm

护柱外径 125/160mm

横梁外径 90/160mm

防护能力 3T、6km/h

产品颜色 黄色

Barrier length 600-1800mm (standard 1800mm / center to center)

Barrier height 500/800/1300mm

Bollard outer diameter 125/160mm

Beam outer diameter 90/160mm

Capacity 3T, 6km/h


Product color Yellow

产品系列

PRODUCT SERIES

防撞柱

BOLLARDS

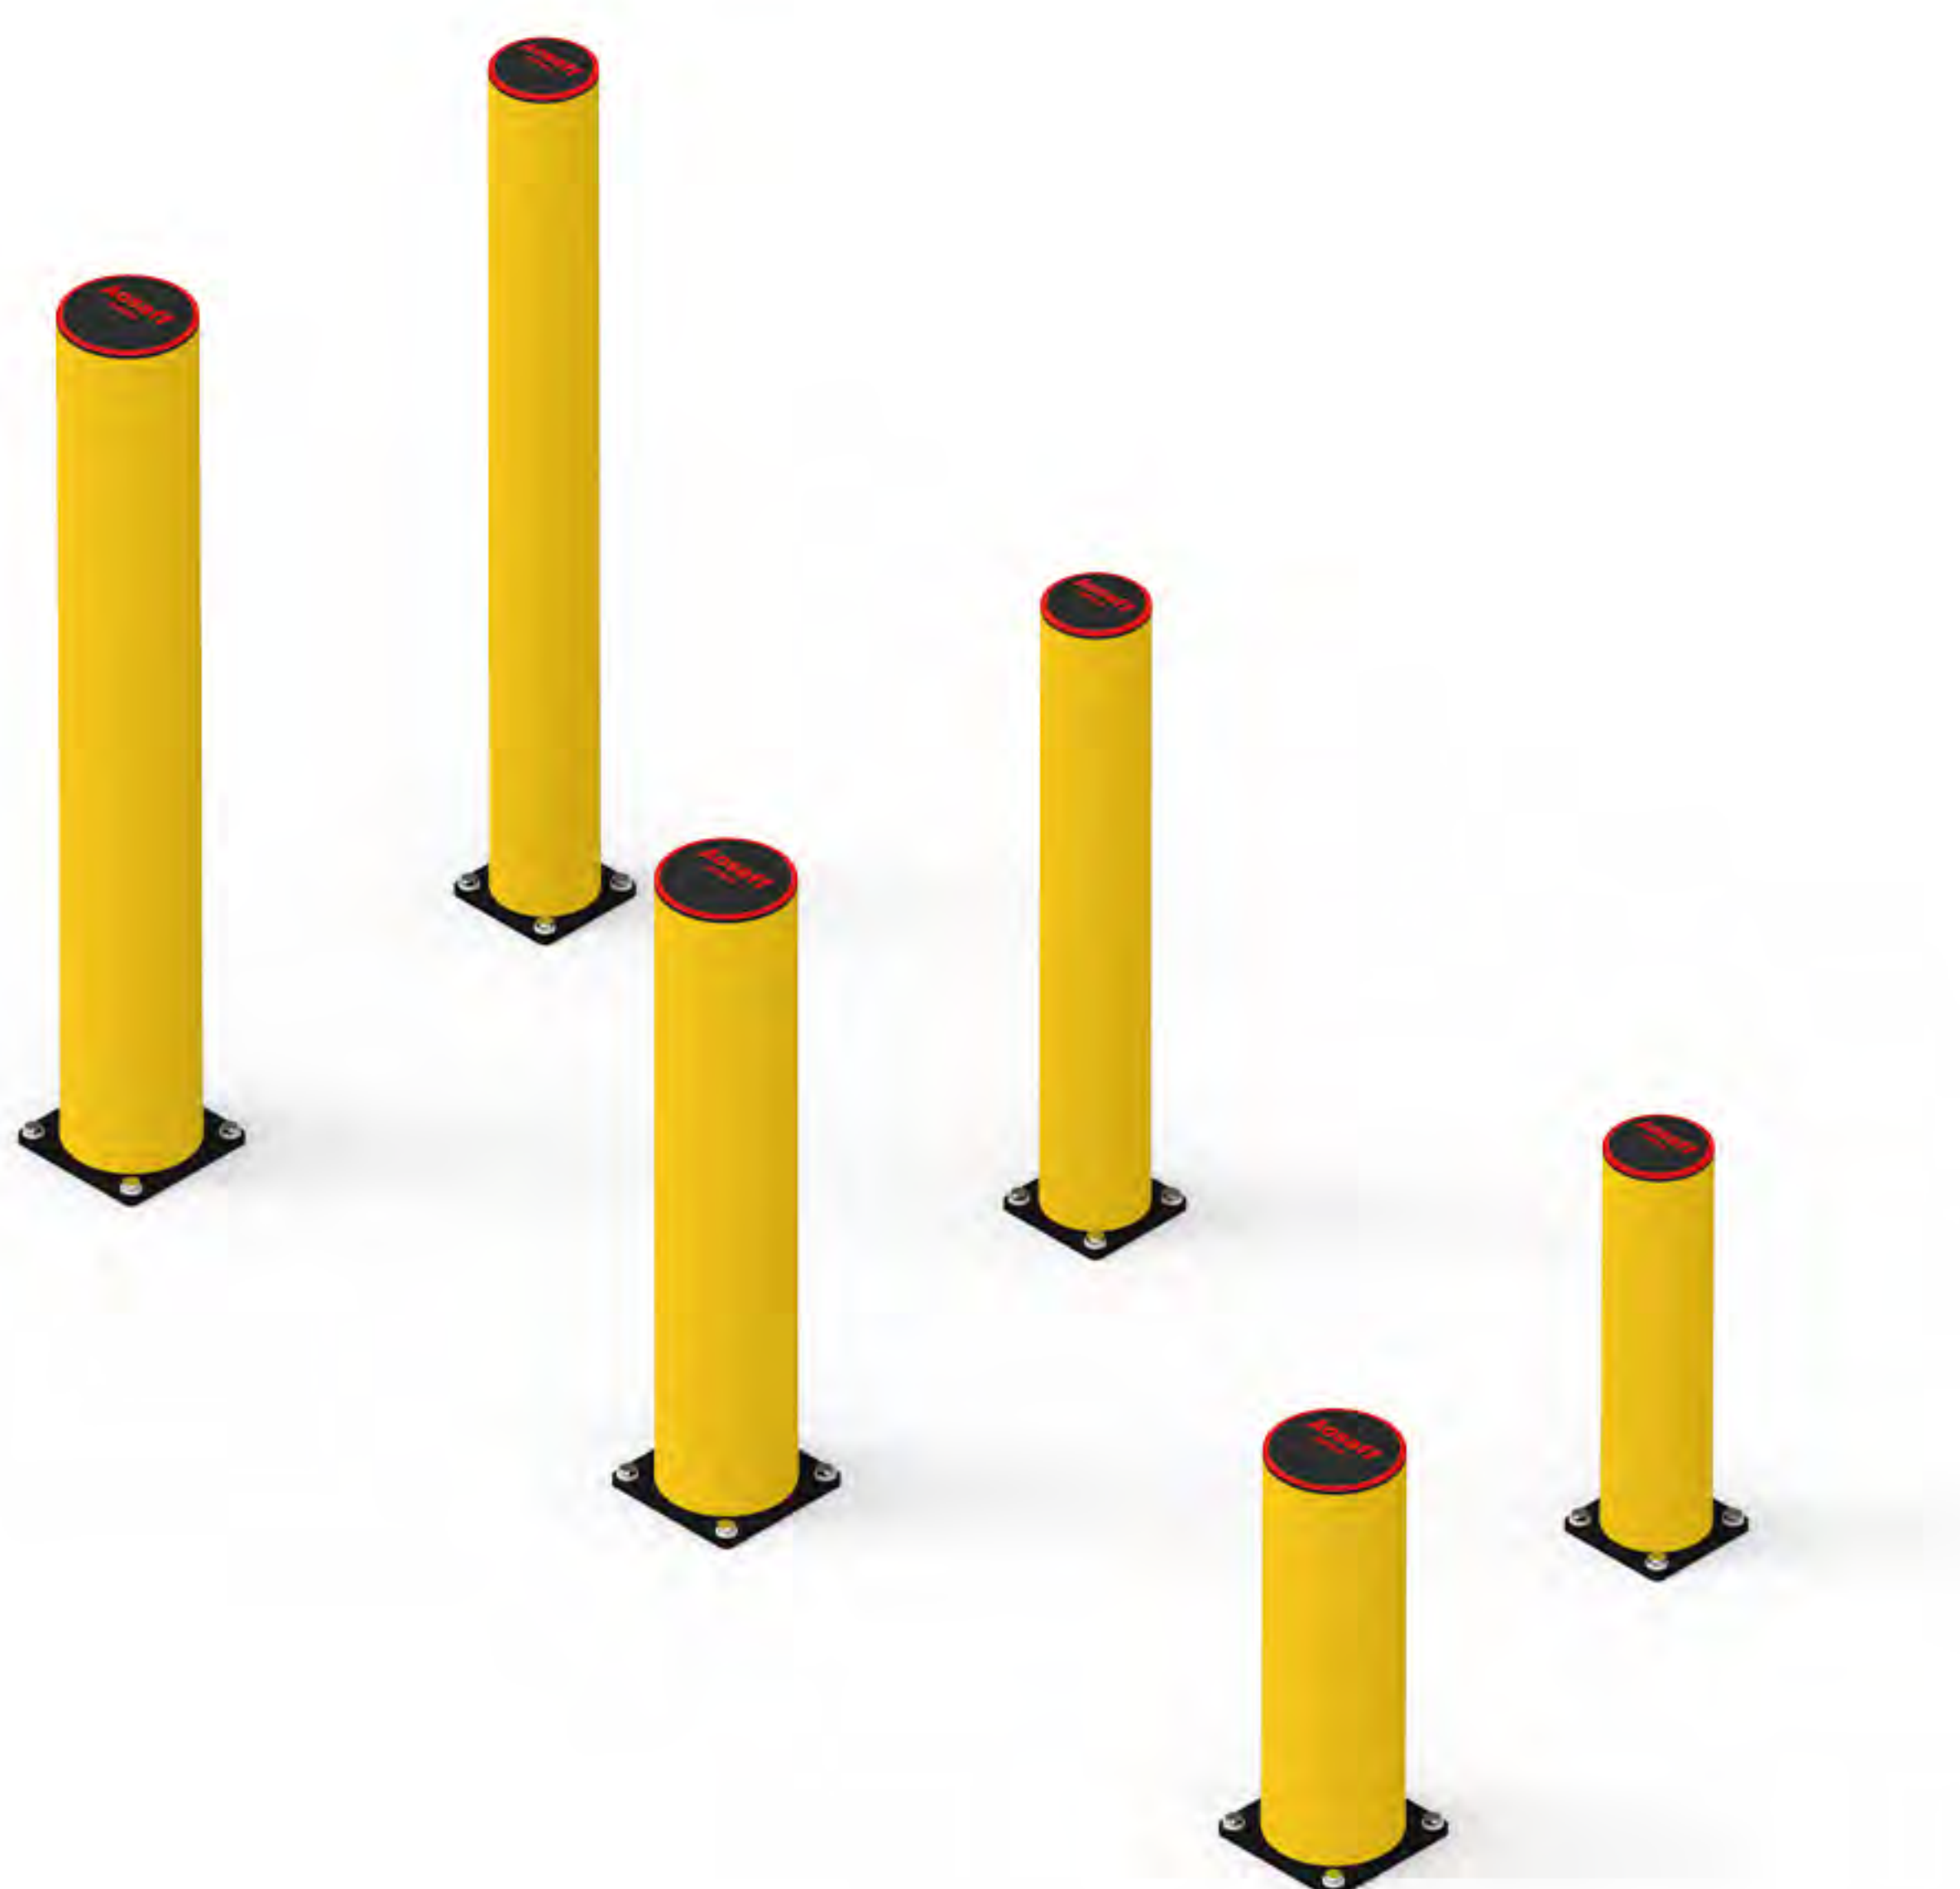

规格参数 Specification

护栏高度 500/800/1100mm
护柱外径 125/160mm
防护能力 1.5T、4km/h | 3T、4.5km/h
产品颜色 黄色
Barrier height 500/800/1100mm
Bollard outer diameter 125/160mm
Capacity 1.5T, 4km/h | 3T, 4.5km/h
Product color Yellow

地栏

GROUND IMPACT BARRIERS






规格参数 Specification

地栏长度 600-2000mm (标准2000mm)
地栏高度 155/190mm
地梁外径 125/160mm
防护能力 1.5T、4km/h | 3T、4.5km/h
产品颜色 黄色
Barrier length 600-2000mm (standard 2000mm)
Barrier height 155/190mm
Beam outer diameter 125/160mm
Capacity 1.5T, 5km/h | 3T, 4.5km/h
Product color Yellow

应用场景

APPLICATION

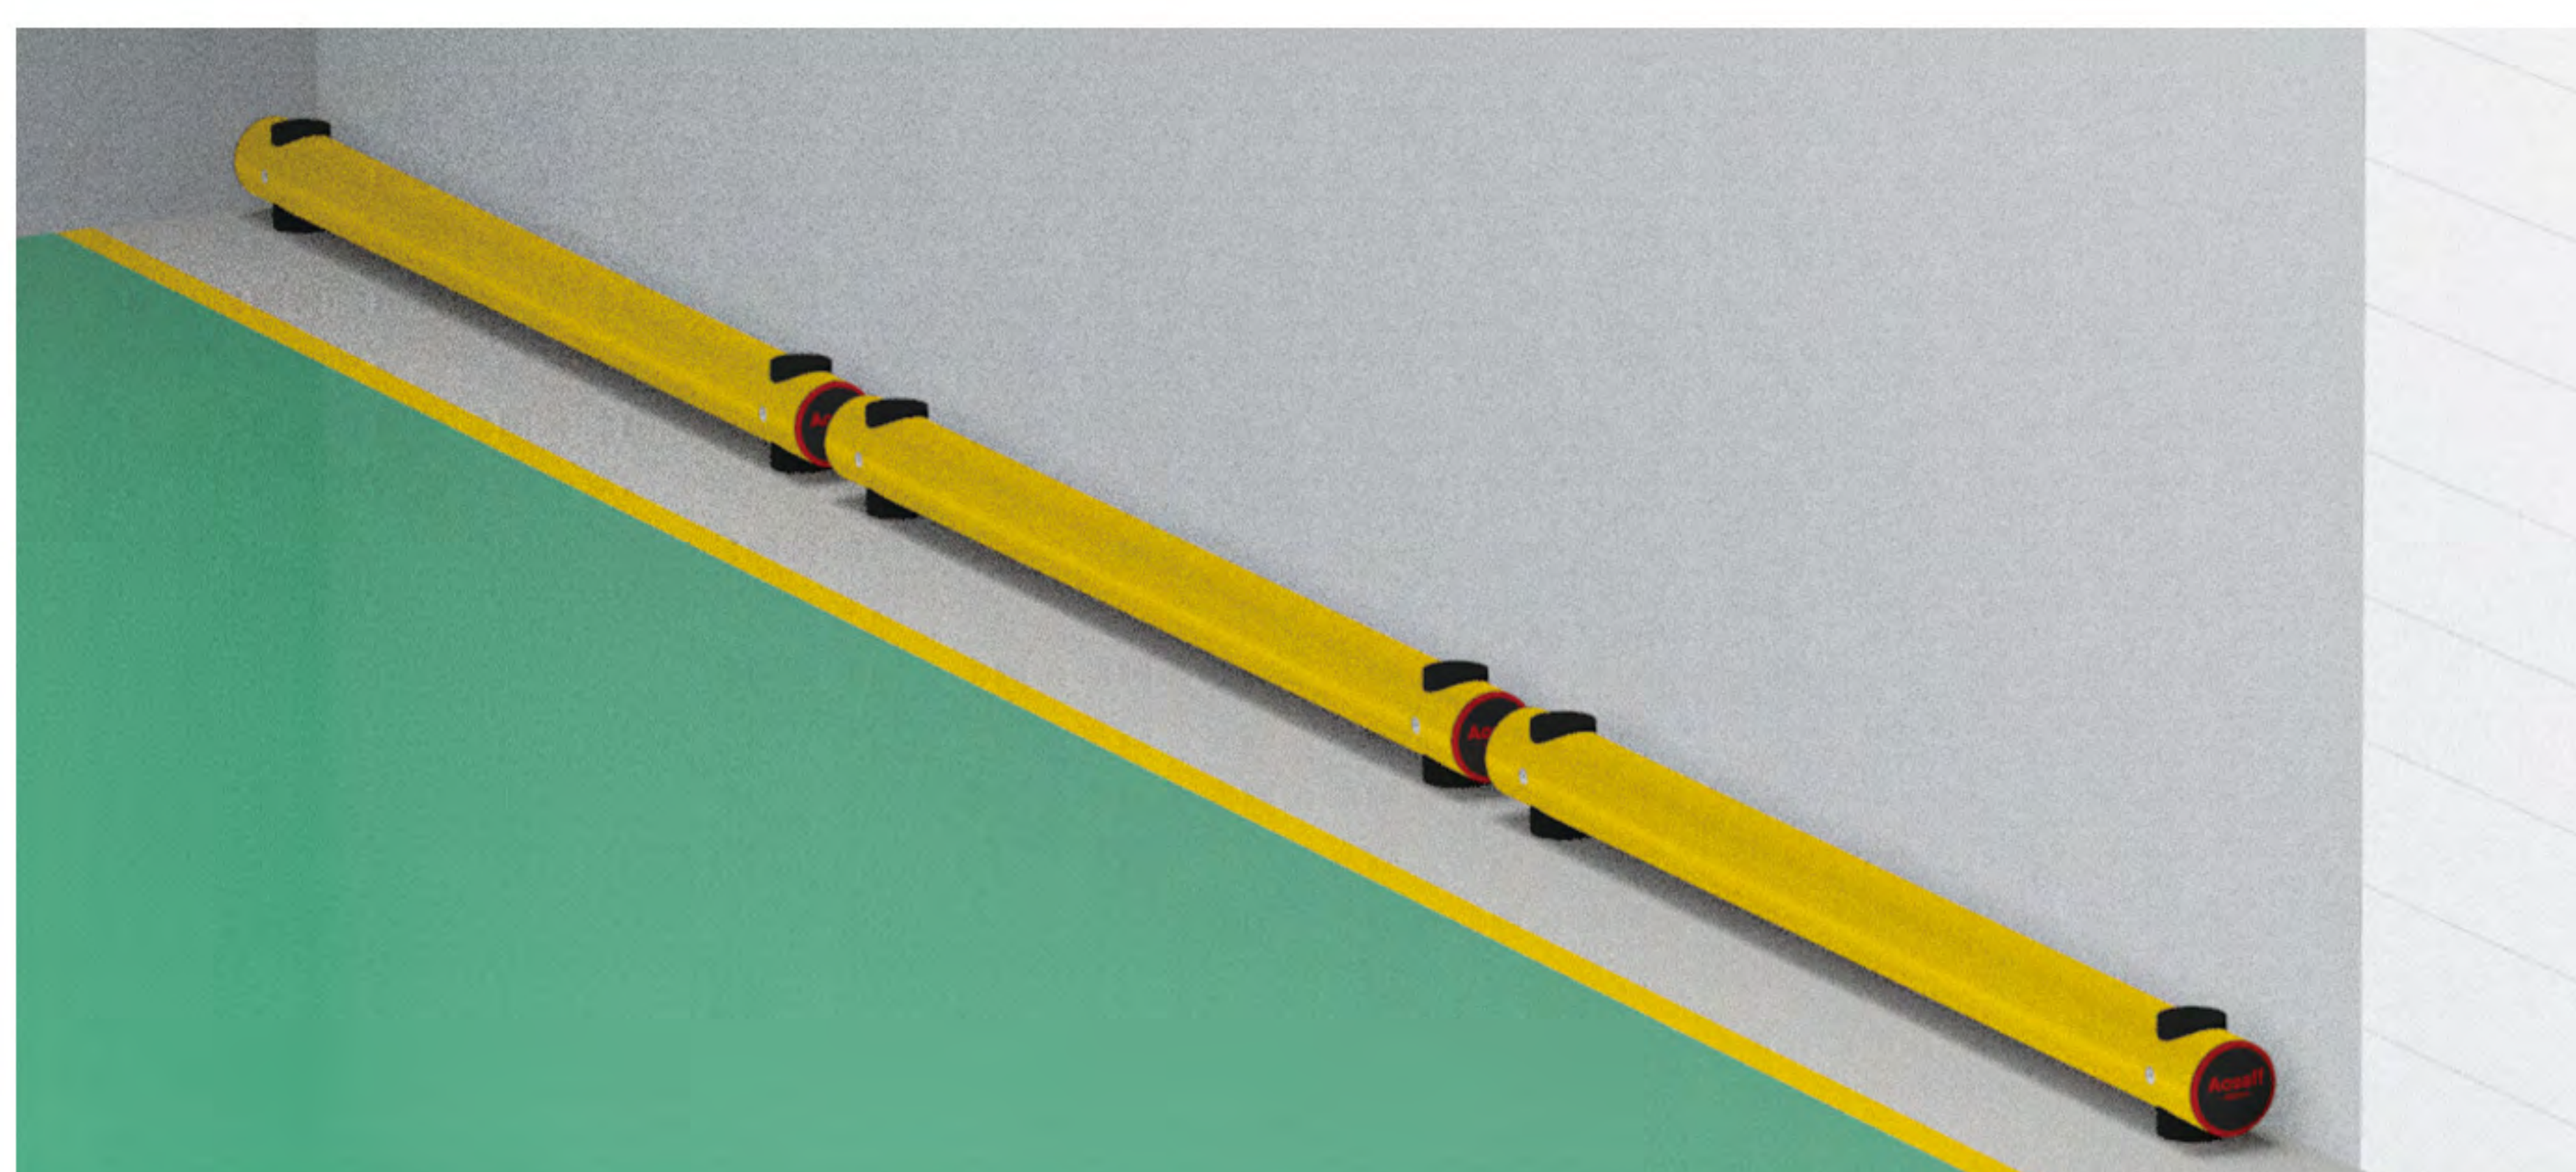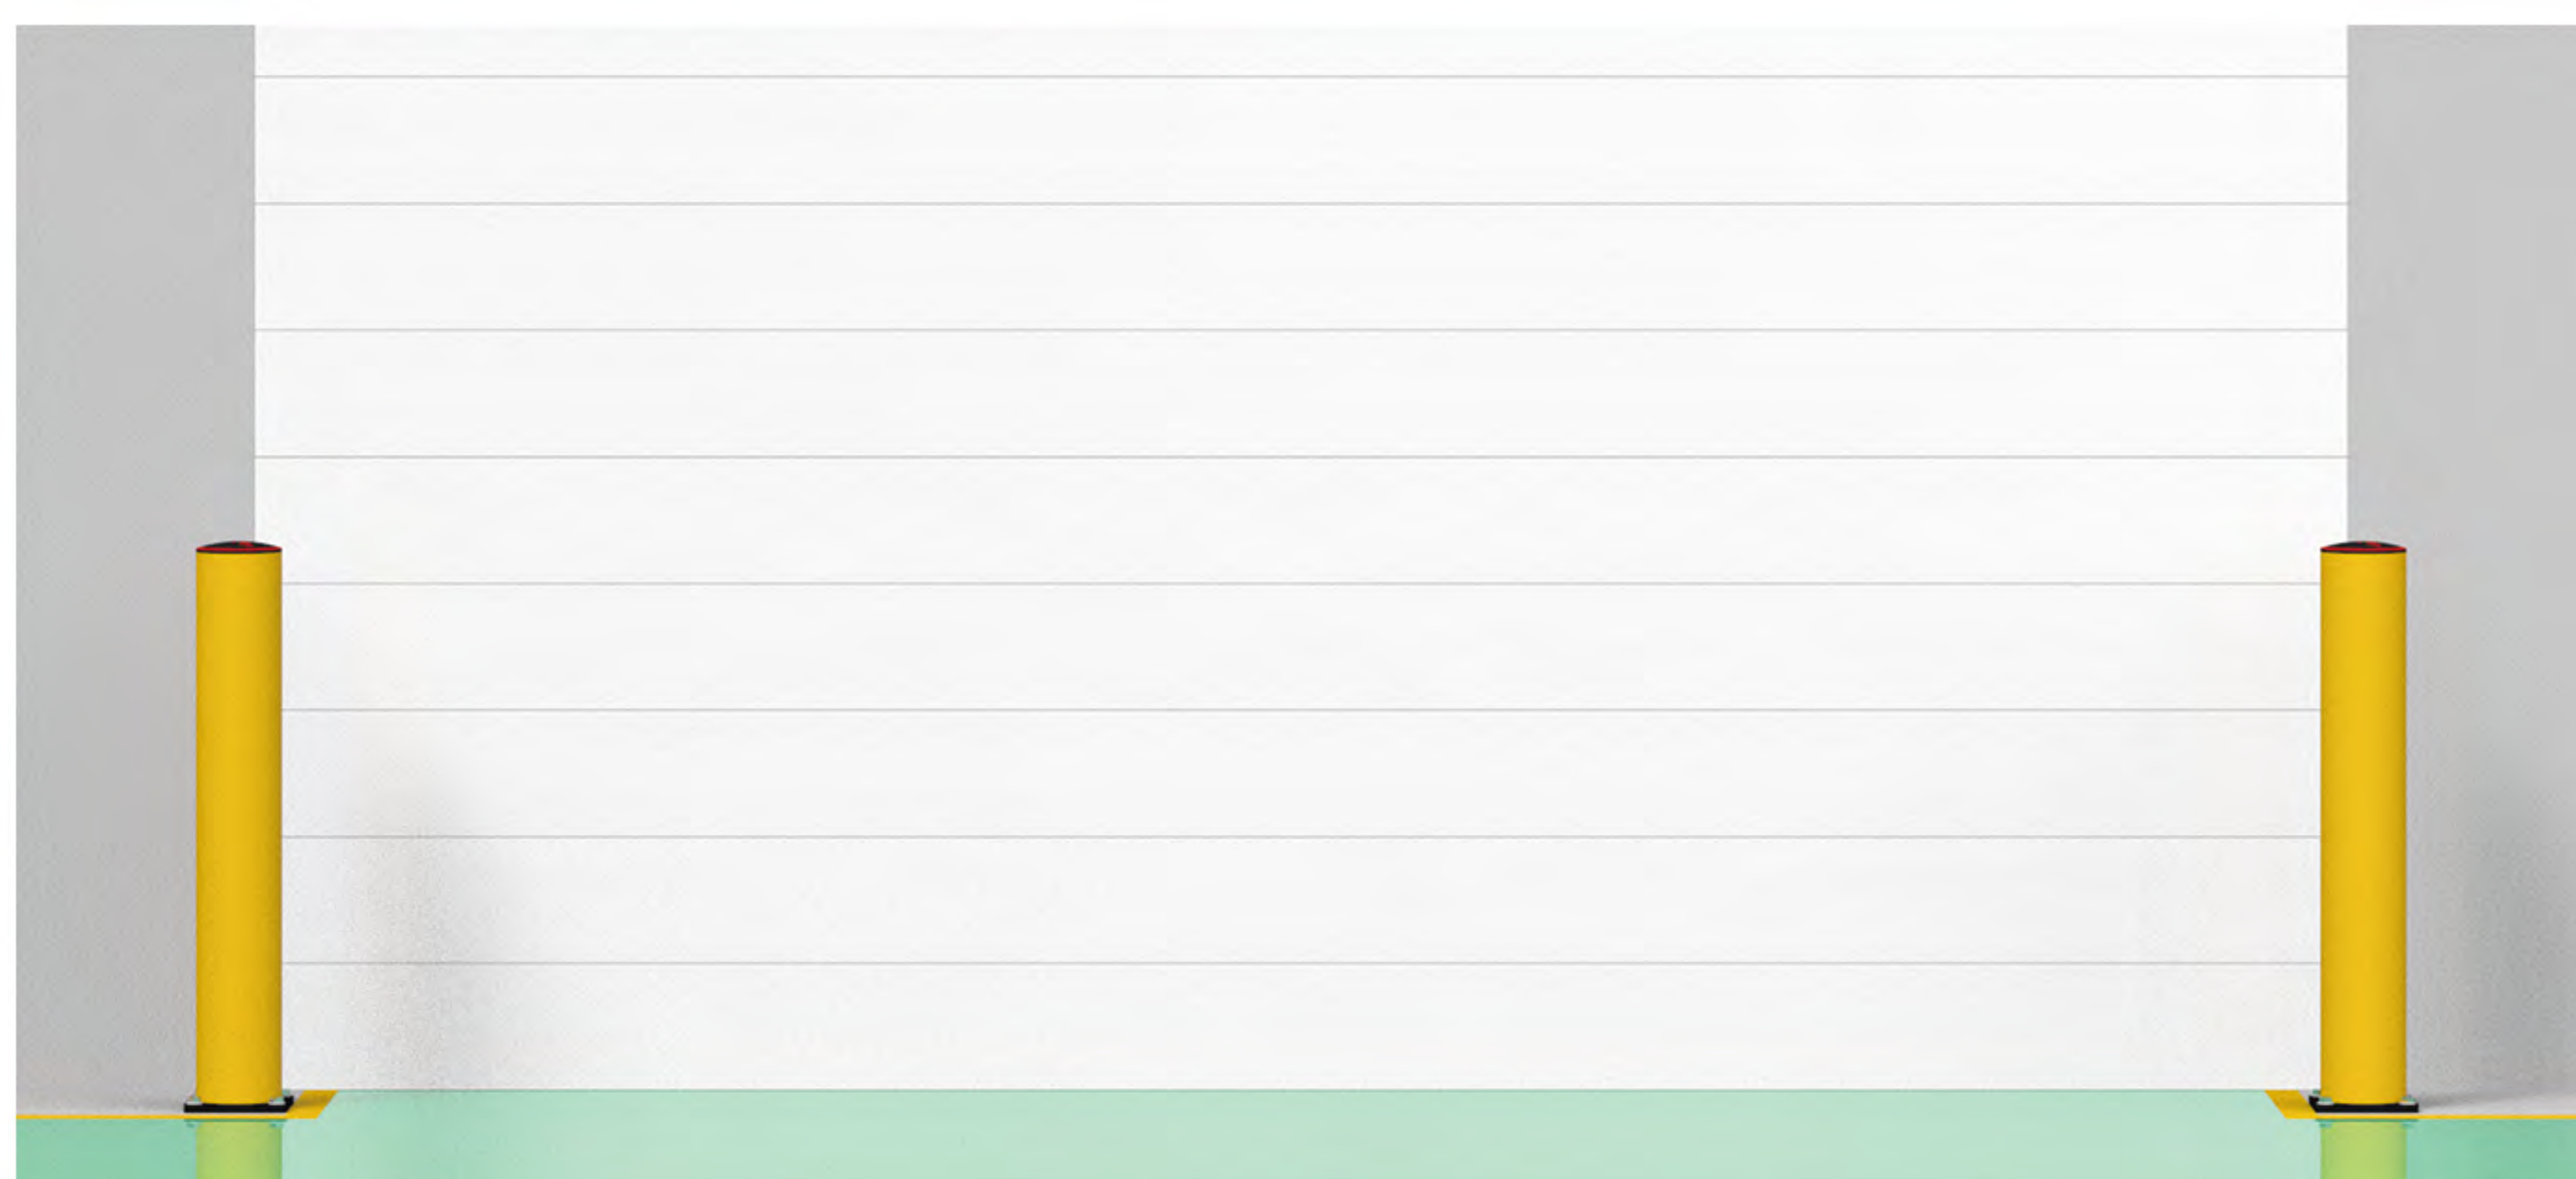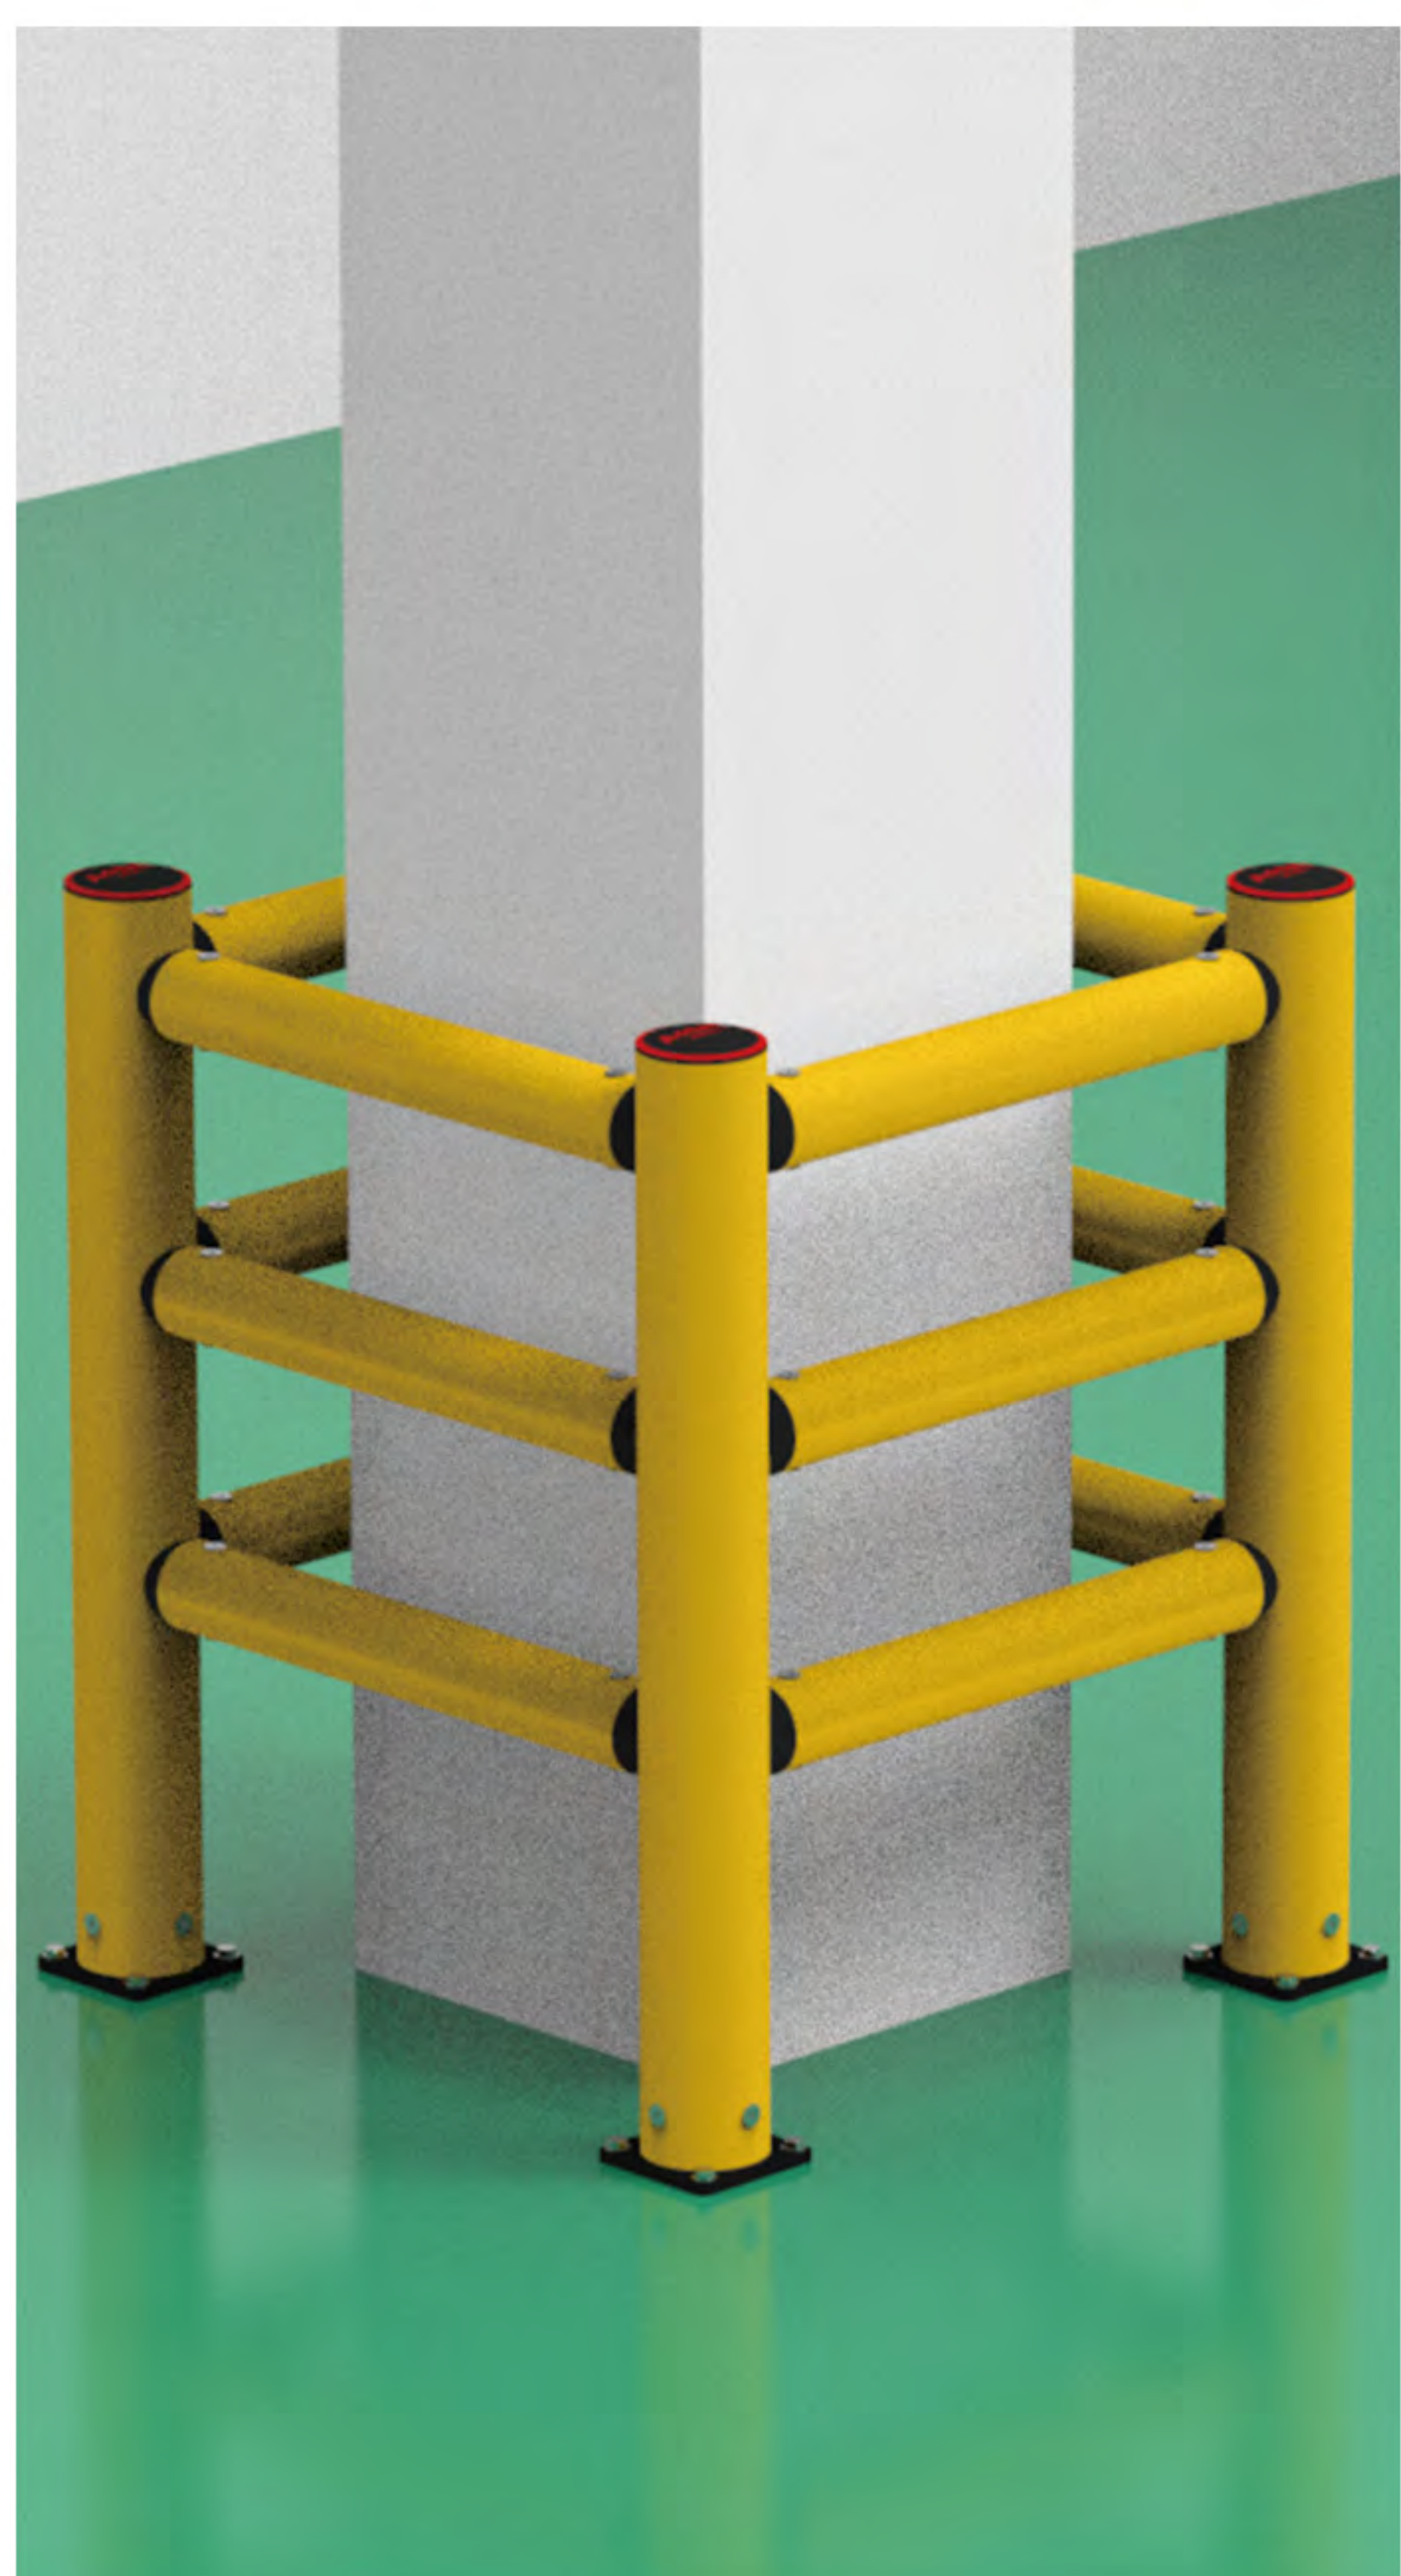



Aosaff

安全防护系统

SAFETY GUARDING FENCE

Aotto 奥图股份

济南奥图自动化股份有限公司 Jinan Aotto Automation Co., Ltd.

地址: 济南市经济开发区华德路355号

Addr.: No. 355, Huade Road, Jinan EDA

电话: 0531-86521778 / 86521788

Tel: 0531-86521778 / 86521788

传真: 0531-86521797

Fax: 0531-86521797

邮箱: aosaff@aotto.cn

E-mail: aosaff@aotto.cn

官网: www.aotto.cn

Web: www.aotto.cn

产品站: www.e-aotto.com

Product Station: www.e-aotto.com

售后服务热线: 400-618-6177

Service Hotline: 400-618-6177